



P O L Y K E N 510

I N D U S T R I A L T A P E S

POLYKEN® 510

Vinyl-Coated Cloth Gaffer's Tape


APPLICATIONS

- Used to protect and anchor wiring in the photography and film industry.
- Bookbinding.
- Vinyl seat repair.
- Wrapping or bundling wire, metals, and plastics.
- Moisture and dust-proof sealing of equipment cases and film canisters.
- Designed to withstand exterior weather and temperature applications.

FEATURES & BENEFITS

- Heavy-duty vinyl-coated waterproof cloth with excellent conformability.
- High tack tape with excellent adhesion for superior performance.
- Non-reflective, low-gloss backing.
- Excellent performance over a wide temperature range.
- Clean removal adhesive.
- High thread count for a clean, straight tear.

CONSTRUCTION

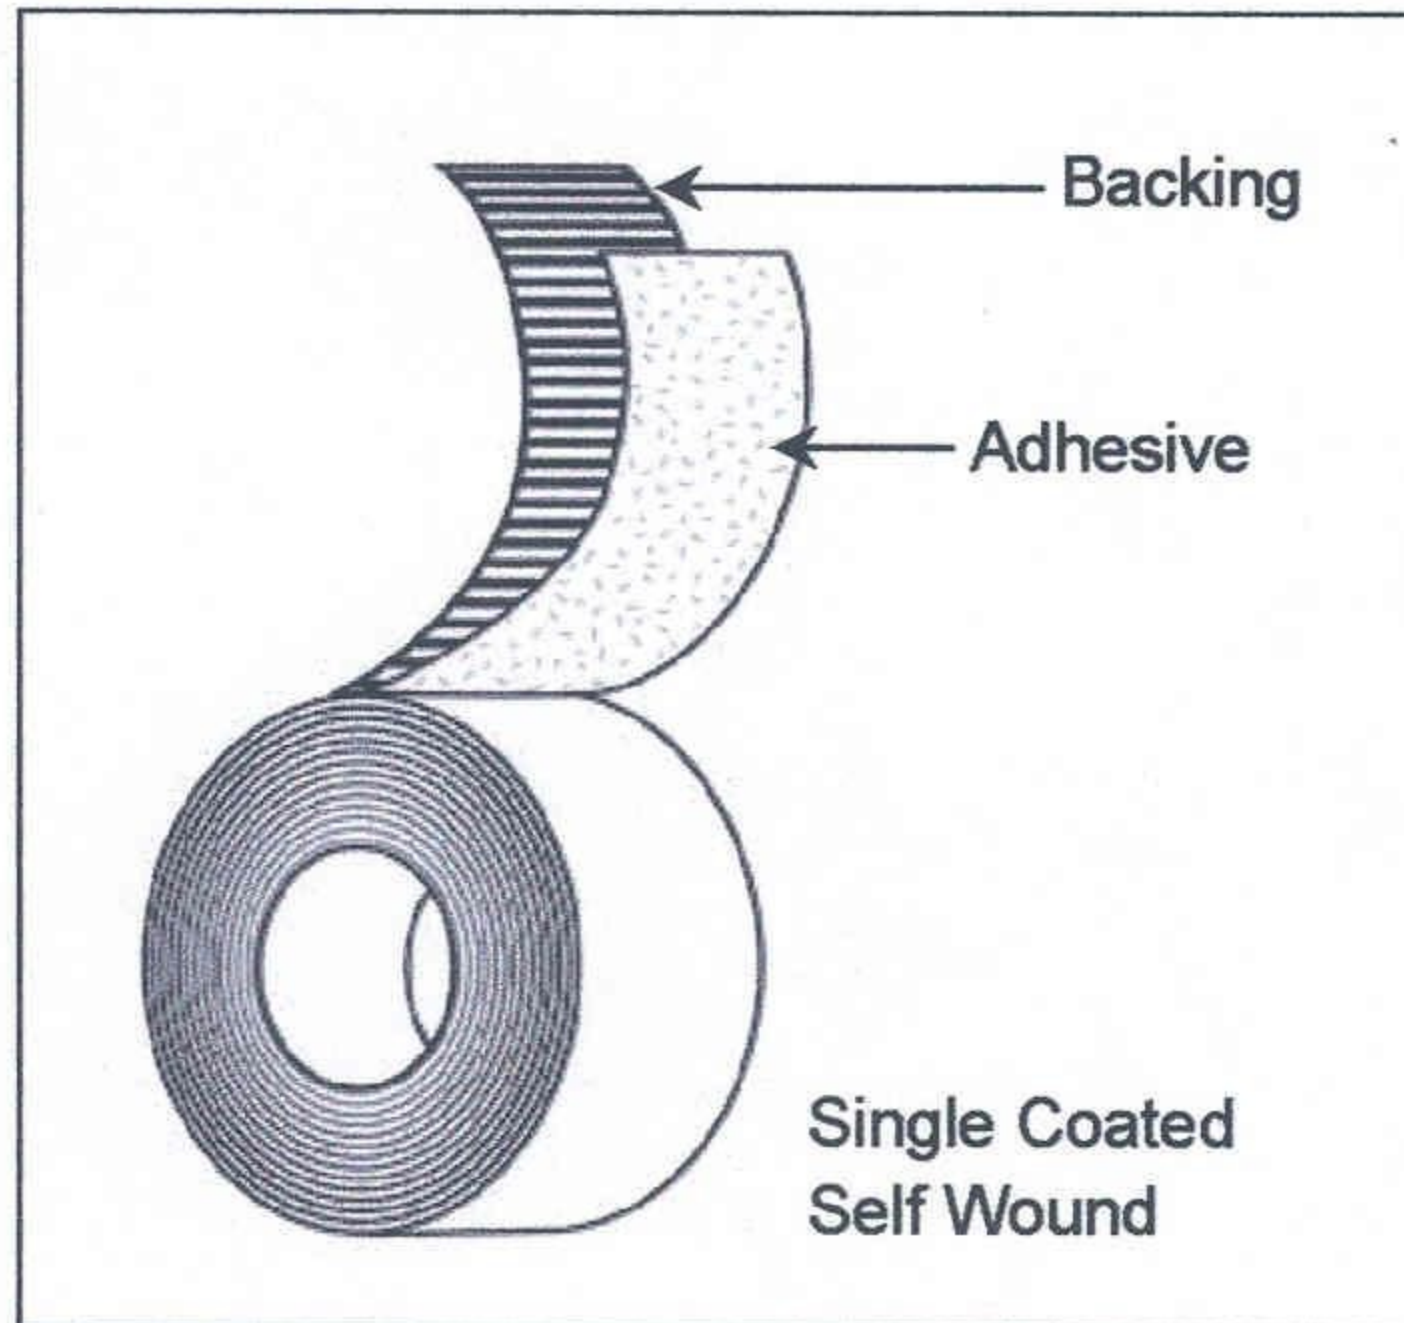

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Vinyl-coated Cloth.

Adhesive:

- Rubber-based

Colors:

- Black, Blue, Brown, Gray, Green, Olive Drab, Red, White, Yellow

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	11.5 mils	0.290 mm	ASTM D 1000
Adhesion to Steel	50 oz./in.	56.0 g/mm	PSTC-1
Adhesion to Backing	29 oz./in.	32.48 g/mm	PSTC-1
Tensile Strength	42 lb./in.	0.75 kg/mm	ASTM D 1000
Tack (Rolling Ball)	4"		
Maximum Performance Temperature	200 F		

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.



Oficinas México:

Polyken
Prolongación Estadio Azteca No.18
Col.: El Caracol, C.P.: 04300
México, D.F., Delegación: Coyoacan
Tel.: (55) 5528-0161; (55) 5528-0052
Fax.: (55) 5424-1920
ventasyservicio@polyken.com.mx
direccion@polyken.com.mx

Oficinas en Estados Unidos

Polyken
1211 San Dario Ave. No. 1481
Laredo, Tx. 78040
Tel. : (956) 220-3812

Bodega en Estados Unidos

Polyken
406 Enterprise Rd.
Interamerica Park
Laredo, Tx 78045
Tel.: (956) 727-2491
Fax.: (956) 724-8509
Contacto: Jesús Alberto Marina Delgado